


PALACE SERIES



HA653




HA653

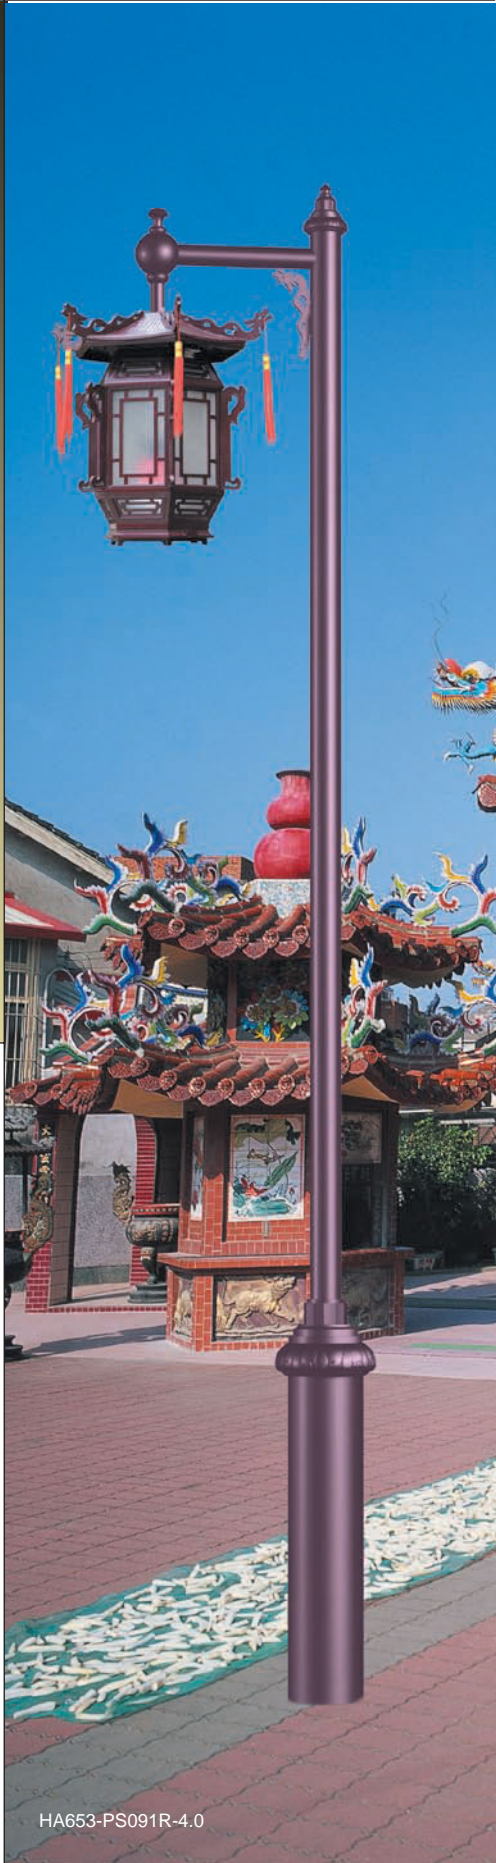


HA653-PS091R-4.0



Dimensions

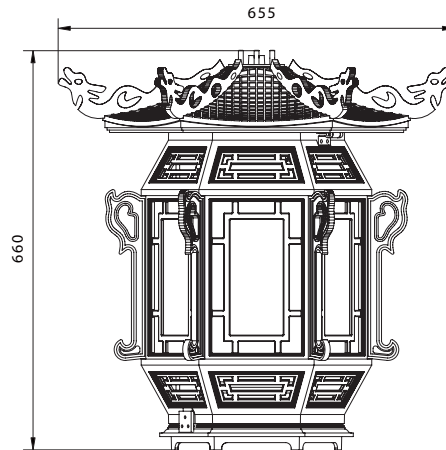

Mechanical

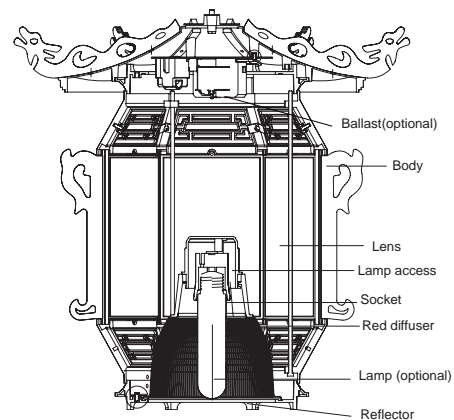

## Specifications

**Application:** Urban roads and street , Squares areas, Pedestrian areas, Residential areas,Parks,Garden

**Installing Hight:** 3-5m

**Mounting :** Hang installation,suitable for ?42mm tube

**Lamps:** HID (HPS MH)/ LED bulb / CFL lamps, 30W-150W

70W/150W HPS high pressure sodium, cap: E27/E26/E40/E39

70W/150W MH metal halide, cap: E27/E26/E40/E39

35w/45W/65W Compact fluorescent, cap: E27/E26

20W/30W/50W/70W Led bulb, cap: E27/E26/E40/E39

**Material:** FRP, fiber glass body

Body & Housing: Fiberglass-reinforced plastics, excellent mechanical strength and bear the causticity

Reflector:Anodized high pure aluminium

Globe : High efficiency acrylic refractor

Down lens: Clear Curved & toughened glass


**Finish Color:** Standard colors is black (BK)& RAL3004 Red ,other colors are available

**Standards:**

Isolation degree Class I, IP Rating(optical) IP65


Photometrics

Photometric curve

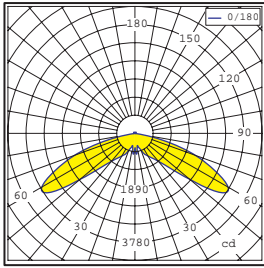

Lamp:150W HPS 15000Lm

Isolux curve

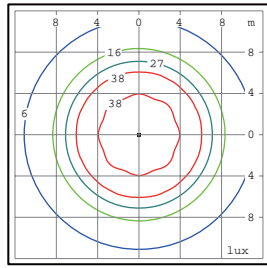


Mounting Height:4m

Ordering Guide

Luminaire No. - Pole No.

Order No.	HEIGHT mm	Luminaire Ctn. cm	Total Vol m <sup>3</sup>	G.W./N.W. kg/ctn	QUANTITIES 20'/40'
HA653	670	67x59x15/ 52x45x55	0.2	16/14	140/280
HA653-PS09R1-4.0	4000	67x59x68/1pcs	0.52	61/58	52/110
HA653-PS09R2-4.0	4000	67x59x68/1pcs	0.79	77/71	35/72

Pole Config

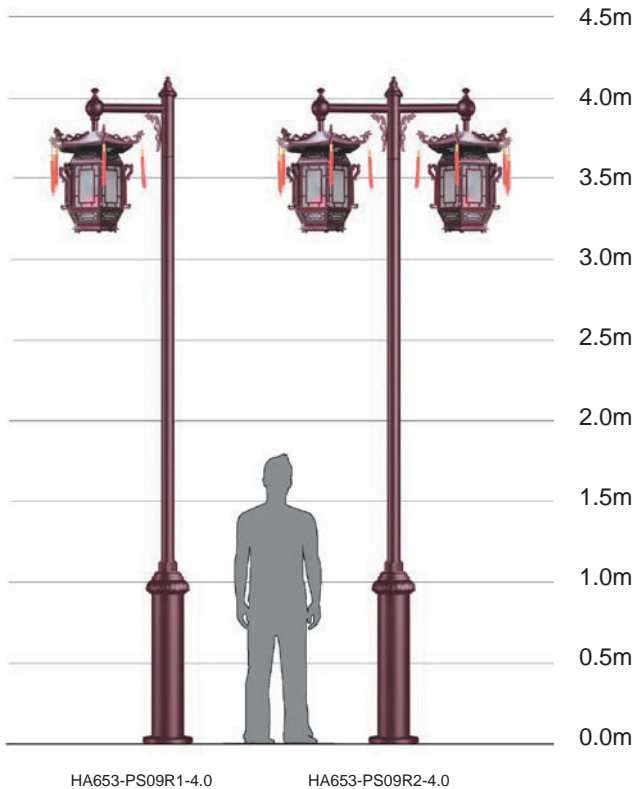

HA653-PS09R1-4.0

HA653-PS09R2-4.0