

FLOR SERIES



HA150



HA150

Feature


- Contemporary style area lighting
- Very High quality for upmarket
- Heavy-duty, die-cast FRP housing
- High efficiency acrylic refractor
- Tool-less removable power tray assembly for ease of maintenance
- Available with medium- or mogul-base socket
- Base casting slip fits over a standard 3" O.D. tenon




HA150-PS06-4.0



Dimensions

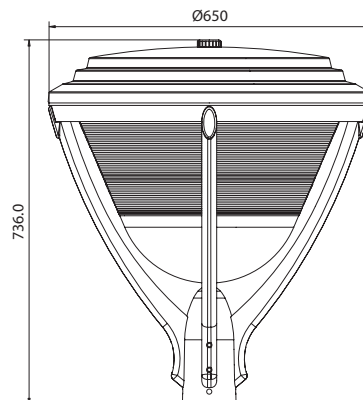

Mechanical

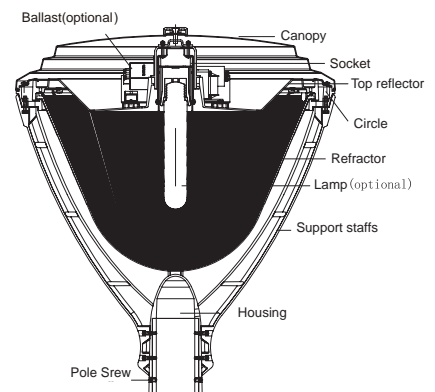

Specification

Application: Urban roads and street , Squares areas, Pedestrian areas, Residential areas,Parks

Installing Hight: 3-5m

Mounting: Post-top, suitable for Ø76mmx100mm tenons

Lamps HID (HPS MH)/ LED bulb / CFL lamps, 30W-400W
70W//150W/250W/400W HPS high pressure sodium, cap: E27/E26/E40/E39

70W/150W/250W/400W MH metal halide, cap: E27/E26/E40/E39

30W/40w/50W Led bulb, cap: E27/E26/E40/E39

35W/45W/65W Compact fluorescent, cap: E27/E26

Input Voltage: 90-270VAC,50-60HZ

Material: FRP, fiber glass body

Canopy: aluminium

Top reflector,Circle,Support staffs & Housing: Fiberglass-reinforced plastics,excellent mechanical strength and bear the causticity

Refractor : High efficiency acrylic refractor,


Color: Standard painting colors is black (BK) ,other colors dark grey(GY)(RAL7016),light grey(LG)(RAL7042) are available

Standards:

Isolation degree Class I, IP Rating IP65


Photometrics

Photometric curve

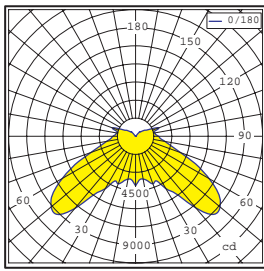

Lamp:400W MH 44000Lm


Isolux curve

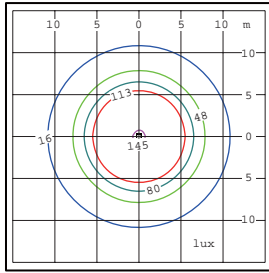

Mouthing Height:5m

TYPE V


Isolux curve

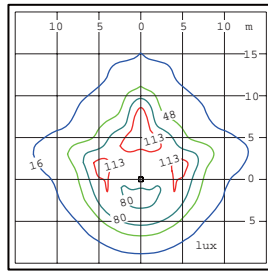

Mouthing Height:5m

TYPE III

Isolux curve

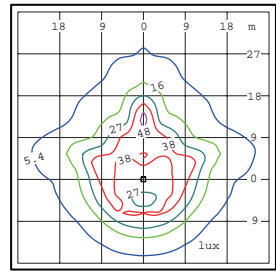

Mouthing Height:9m

TYPE III

Ordering Guide

Luminaire No. - Pole No.

Order No.	HEIGHT mm	Luminaire Ctn. cm	Total Vol m ³	G.W./N.W. kg/ctn	QUANTITIES 20'/40'
HA150	736	66x66x76/1pcs	0.33	17/14	72/162
HA150-PS05-3.0	3700	66x66x76/1pcs	0.45	47/44	55/120
HA150-PS05-4.0	4700	66x66x76/1pcs	0.49	54/51	50/110
HA150-PS06-3.0	3700	66x66x76/1pcs	0.45	47/44	55/120
HA150-PS06-4.0	4700	66x66x76/1pcs	0.49	57/54	50/110
HA150-PS06-5.0	5700	66x66x76/1pcs	0.53	65/62	48/102
HA150-PS06-6.0	6700	66x66x76/1pcs	0.57	73/70	/96

