

EBEI SERIES




HA153



HA153

Feature

- Contemporary style area lighting
- Very High quality for upmarket
- Heavy-duty, die-cast FRP housing
- High efficiency acrylic refractor
- Tool-less removable power tray assembly for ease of maintenance
- Available with medium- or mogul-base socket
- Base casting slip fits over a standard 3" O.D. tenon

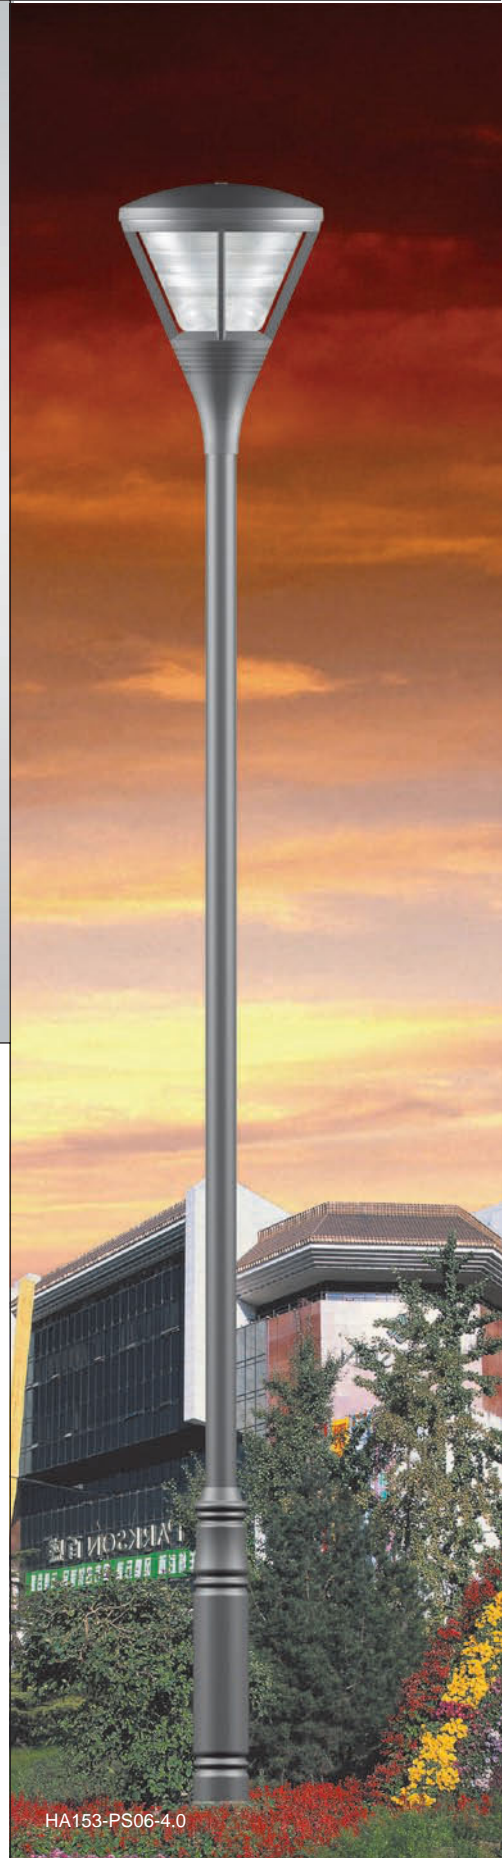


HA153-PS06-4.0




HA153

Dimensions

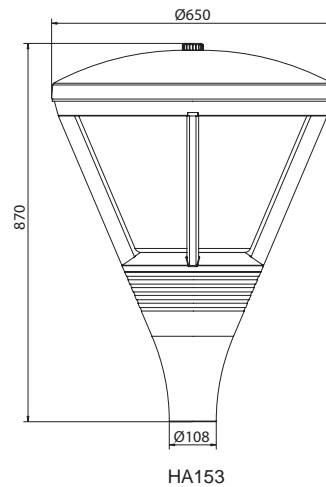

HA153

Mechanical

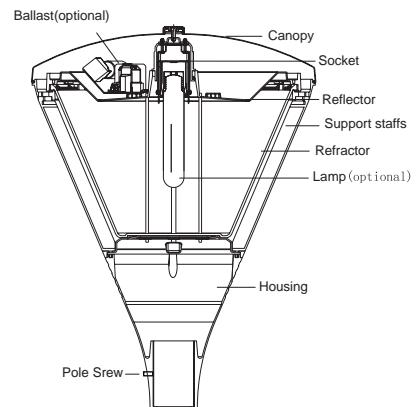

Specification

Application: Urban roads and street , Squares areas,
Pedestrian areas, Residential areas,Parks

Installing Hight: 3-5m

Mounting:Post-top,suitable for 76mmx100mm tenons

Lamps HID (HPS MH)/ LED bulb / CFL lamps, 30W-400W
70W//150W/250W/400W HPS high pressure sodium, cap: E27/E26/
E40/E39

70W/150W/250W/400W MH metal halide, cap: E27/E26/E40/E39

30W/40w/50W Led bulb, cap: E27/E26/E40/E39

35W/45W/65W Compact fluorescent, cap: E27/E26

Input Voltage: 90-270VAC,50-60HZ

Material: FRP, fiber glass body

Canopy: aluminium

Top reflector,Circle,Suppoet staffs & Housing: Fiberglass-reinforced
plastics,excellent mechanical strength and bear the causticity

Refractor : High efficiency acrylic refractor,


Color: Standard painting colors is black (BK) ,other colors dark
grey(GY)(RAL7016),light grey(LG)(RAL7042) are available

Standards:

Isolation degree Class I, IP Rating IP65


Photometrics

Photometric curve

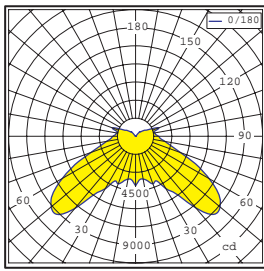


Lamp:400W MH 44000Lm

Isolux curve

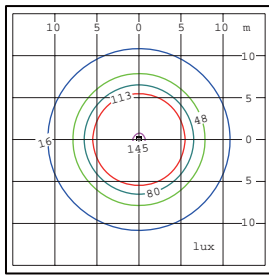

Mouthing Height:5m


Isolux curve

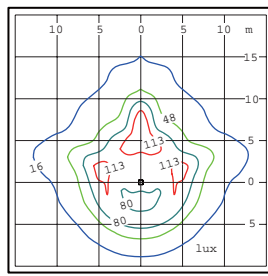

Mouthing Height:5m

TYPE III

Isolux curve

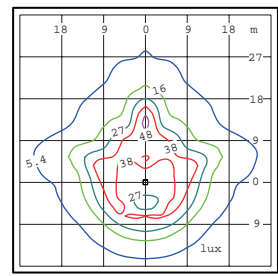

Mouthing Height:9m

TYPE III

TYPE V

Ordering Guide

Luminaire No. - Pole No.

| Order No. | HEIGHT mm | Luminaire Ctn. cm | Total Vol m ³ | G.W./N.W. kg/ctn | QUANTITIES 20'/40' |
|----------------|--------------|----------------------|-----------------------------|---------------------|-----------------------|
| HA153 | 870 | 66x66x88/1pcs | 0.39 | 18/15 | 60/126 |
| HA153-PS05-3.0 | 3800 | 66x66x88/1pcs | 0.51 | 48/45 | 50/102 |
| HA153-PS05-4.0 | 4800 | 66x66x88/1pcs | 0.55 | 55/52 | 46/95 |
| HA153-PS06-3.0 | 3800 | 66x66x88/1pcs | 0.51 | 48/45 | 50/102 |
| HA153-PS06-4.0 | 4800 | 66x66x88/1pcs | 0.55 | 58/55 | 46/95 |
| HA153-PS06-5.0 | 5800 | 66x66x88/1pcs | 0.59 | 66/63 | 43/89 |
| HA153-PS06-6.0 | 6800 | 66x66x88/1pcs | 0.63 | 74/71 | /84 |

