

DIDA SERIES





HA254X

Feature


- Contemporary style area lighting
- Very High quality for upmarket
- Heavy-duty, die-cast FRP housing
- High efficiency acrylic lens with inner refractor(arcyl or glass)
- Tool-less removable power tray assembly for ease of maintenance
- Available with medium- or mogul-base socket
- Base casting slip fits over a standard 3" O.D. tenon




HA254X-PS08-3.5



Dimensions

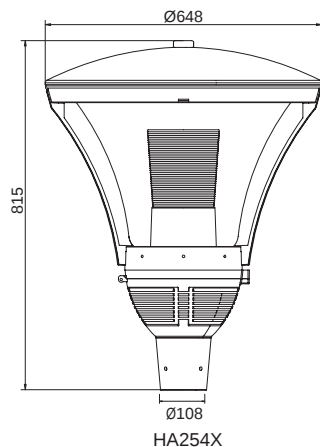

Mechanical

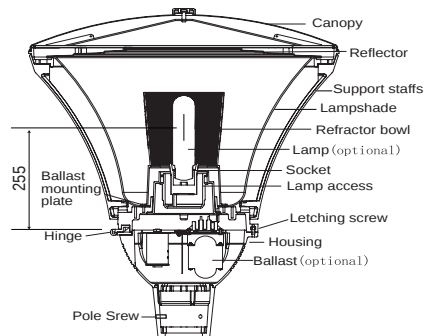

Specification

Application: Urban roads and street , Squares areas,
Pedestrian areas, Residential areas,Parks

Installing Hight: 3-5m

Mounting: Post-top,suitable for Ø76mmx90mm tenons

Lamps HID (HPS MH)/ LED bulb / CFL lamps, 30W-150W

70W//150W HPS high pressure sodium, cap: E27/E26/E40/E39

70W/150W/ MH metal halide, cap: E27/E26/E40/E39

30W/40w/50W Led bulb, cap: E27/E26/E40/E39

35W/45W/65W Compact fluorescent, cap: E27/E26

Input Voltage: 90-270VAC,50-60HZ

Material: FRP, fiber glass body

Canopy & Reflector: spun aluminium

Circle,Support staffs & Housing: Fiberglass-reinforced
plastics,excellent mechanical strength and bear the causticity

Lampshade : High efficiency acryl,

Refractor : High efficiency acryl or glass,


Color: Standard painting colors is black (BK) ,other colors dark
grey(GY)(RAL7016),light grey(LG)(RAL7042) are available

Standards:

Isolation degree Class I, IP Rating IP65

Photometrics


Photometric curve



Lamp:150W HPS 15000Lm


TYPE V

Isolux curve

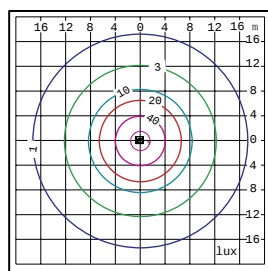

Moughing Height:4m


Photometric curve



Lamp:150W HPS 6000Lm

TYPE V

Isolux curve



Moughing Height:4m

Ordering Guide

Luminaire No. - Pole No.

Order No.	HEIGHT mm	Luminaire Ctn. cm	Total Vol m ³	G.W./N.W. kg/ctn	QUANTITIES 20'/40'
HA254X	816	67x67x85/1pcs	0.38	15/12	48/96
HA254X-PS05-3.5	4300	67x67x85/1pcs	0.52	48/45	48/96
HA254X-PS06-4.0	4800	67x67x85/1pcs	0.54	55/52	48/96
HA254X-PS08-3.5	4300	67x67x85/1pcs	0.52	53/50	48/96

