

Specifications

Application: Roads and highways, Urban roads and street, squares areas, Residential areas, factory

Installing Hight: 5-12m

Mounting : Side-entry, Ø48-Ø60mm x120 spigot

Lamps: HPS High pressure sodium or MH metal halide,

Lamp Wattage: 150W,250W,400W ,E40 Socket

Input Voltage: 220-240V/50Hz,110-130V/60Hz

Power Factor: >0.9

Working Temperature: -40 to 50 C

Material: Aluminium body

Housing: Heavy duty die cast aluminium,with polyester powder coating

Reflector: Anodized high pure aluinium

Lampshade: Clear curved toughened glass

Gasket: Silicone sealing gasket

Lamp holder: Adjustable position for different lamp



Color: Standard painting colors is black (BK), dark grey(GY)(RAL7016),light grey(LG)(RAL7042), silver grey(SG),White(WH),other colors are available

Standards:

Isolation degree Class I, IP Rating IP65




Dimension

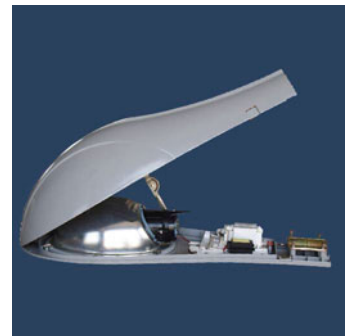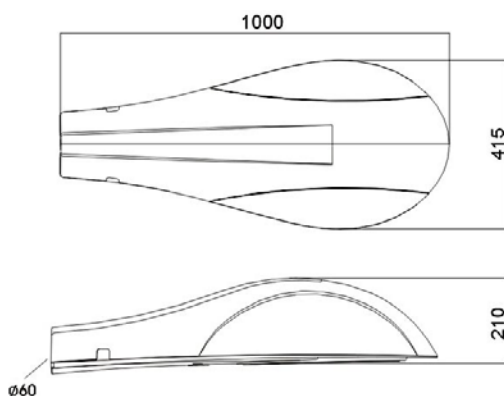


Photometrics


Polar diagram
(150w)
Cone measurement



Polar diagram
(250w)
Cone measurement



Polar diagram
(400w)
Cone measurement

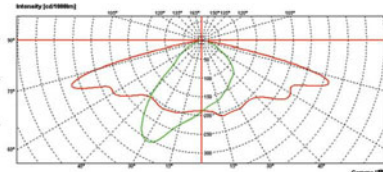

Ordering Information

Order No.	Lamp Wattage	Lamp Socket	Install Height	Gross/ Net Weight	Dimension L*W*H(cm)	Packing size(cm)	QTY(pcs) 20'/40'GP
HL605	MAX 400W	E40	5m-12m	12 / 11kg	100x41.5x24	103x45x29	200/400

