


Photometrics

Photometric curve




Lamp:50W LED 5000Lm

Specification


- Application:** Urban roads and street , Squares areas, Pedestrian areas, Residential areas,Parks
- Installing Hight:** 3-5m
- Mounting :** Post-top: suitable for Ø76mmx60mm tenon
- Lamps:** HID (HPS MH)/ LED bulb / CFL lamps, 30W-150W  
70W/150W HPS high pressure sodium, cap: E27/E26/E40/E39  
70W/150W MH metal halide, cap: E27/E26/E40/E39  
30W/40w/50W Led bulb, cap: E27/E26/E40/E39  
35W/45W/65W Compact fluorescent, cap: E27/E26
- Input Voltage:** 90-270VAC,50-60HZ
- Material:** Aluminium body  
Housing: Die cast aluminium, Powder coating  
Globe : High efficiency acrylic refractor
- Color:** Standard color are Black,Dark grey RAL7016 or Light grey RAL 7042 ,other colors are available
- Standards:**  
Isolation degree Class I, IP Rating IP65



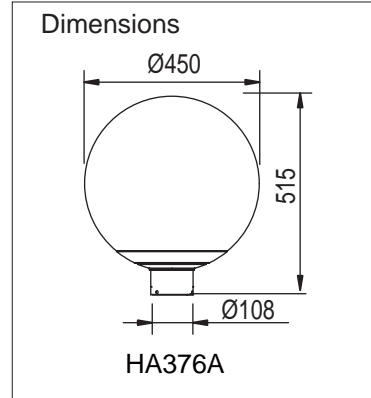

Photometrics

Photometric curve



Lamp:50W LED 5000Lm

Specification

**Application:** Urban roads and street , Squares areas, Pedestrian areas, Residential areas,Parks

**Installing Hight:** 3-5m

**Mounting :** Post-top: suitable for Ø76mmx60mm tenon

**Lamps:** HID (HPS MH)/ LED bulb / CFL lamps, 30W-150W  
70W/150W HPS high pressure sodium, cap: E27/E26/  
E40/E39

70W/150W MH metal halide, cap: E27/E26/E40/E39

30W/40w/50W Led bulb, cap: E27/E26/E40/E39

35W/45W/65W Compact fluorescent, cap: E27/E26

**Input Voltage:** 90-270VAC,50-60HZ

**Material:** Aluminium body

Housing: Die cast aluminium, Powder coating

Globe : High efficiency acrylic refractor

**Color:** Standard color are Black,Dark grey RAL7016 or

Light grey RAL 7042 ,other colors are available

**Standards:**

Isolation degree Class I, IP Rating IP65



Specification

**Application:** Urban roads and street , Squares areas, Pedestrian areas, Residential areas,Parks

**Installing High:** 3-5m

**Mounting :** Post-top: suitable for Ø42mmx40mm tenon

**Lamps:** HID (HPS MH)/ LED bulb / CFL lamps, 30W-150W  
70W/150W HPS high pressure sodium, cap: E27/E26/  
E40/E39

70W/150W MH metal halide, cap: E27/E26/E40/E39

30W/40w/50W Led bulb, cap: E27/E26/E40/E39

35W/45W/65W Compact fluorescent, cap: E27/E26

**Input Voltage:** 90-270VAC,50-60HZ

**Material:** Aluminium body

Housing: Die cast aluminium, Powder coating

Globe : High efficiency acrylic refractor

**Color:** Standard color are Black,Dark grey RAL7016 or

Light grey RAL 7042 ,other colors are available

**Standards:**

Isolation degree Class I, IP Rating IP65

