


SANDI SERIES



HA152

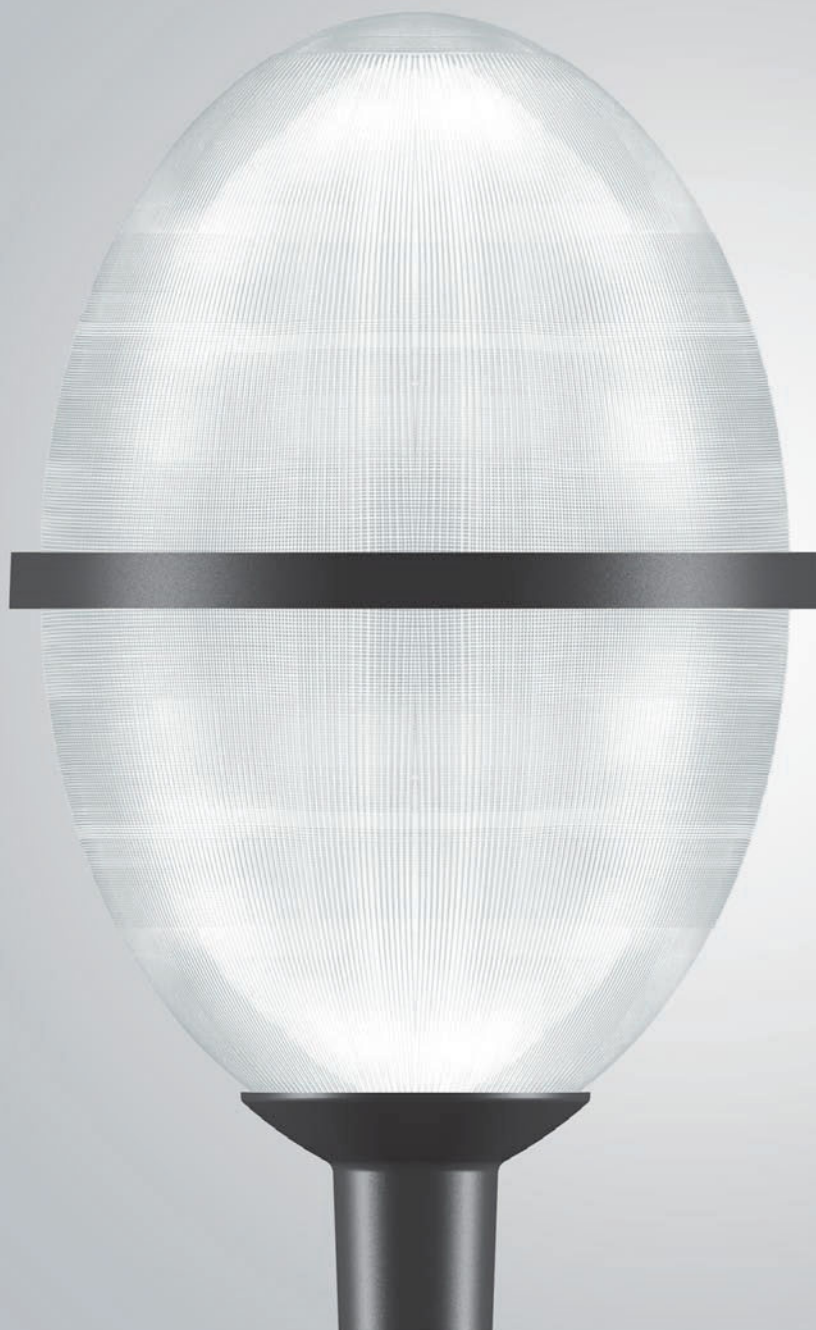


**Feature**

- Contemporary style area lighting
- Very High quality for upmarket
- Heavy-duty, die-cast FRP housing
- High efficiency acrylic refractor
- Tool-less removable power tray assembly for ease of maintenance
- Available with medium- or mogul-base socket
- Base casting slip fits over a standard 3" O.D. tenon






Dimensions

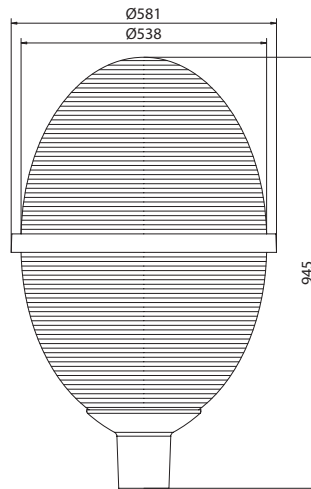

Mechanical

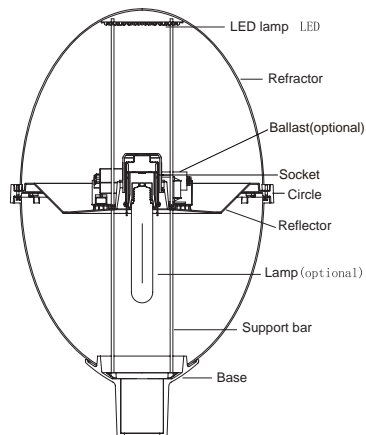

Specification

Application: Urban roads and street , Squares areas,  
Pedestrian areas, Residential areas,Parks

Installing Hight: 3-5m

Mounting:Post-top,suitable for Ø76mmx100mm tenons

Lamps HID (HPS MH)/ LED bulb / CFL lamps, 30W-400W

70W//150W/250W/400W HPS high pressure sodium, cap:  
E27/E26/E40/E39

70W/150W/250w/400w MH metal halide, cap: E27/E26/  
E40/E39

30W/40w/50W Led bulb, cap: E27/E26/E40/E39

35W/45W/65W Compact fluorescent, cap: E27/E26

Input Voltage: 90-270VAC,50-60HZ

Material: FRP, fiber glass body

Circle ,Reflector & Housing:Fiberglass-reinforced  
plastics,excellent mechanical strength and bear thecausticity

Refractor : High efficiency acrylic refractor,


Color: Standard painting colors is black (BK) ,other colors dark  
grey(GY)(RAL7016),light grey(LG)(RAL7042) are available

Standards:

Isolation degree Class I, IP Rating IP65

Photometrics


Photometric curve

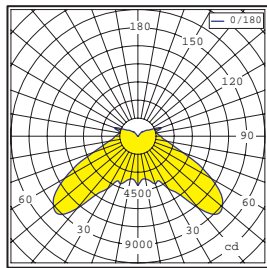

Lamp:400W MH 44000Lm


TYPE V

Isolux curve

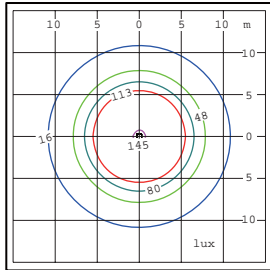

Moughing Height:5m


Isolux curve

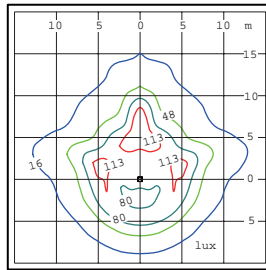

Moughing Height:5m

TYPE III

Isolux curve

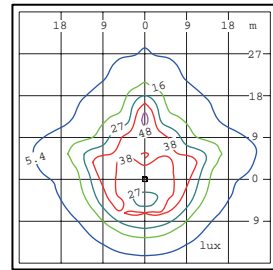

Moughing Height:9m

TYPE III

Ordering Guide

Luminaire No. - Pole No.

Order No.	HEIGHT mm	Luminaire Ctn. cm	Total Vol m <sup>3</sup>	G.W./N.W. kg/ctn	QUANTITIES 20'/40'
HA152	950	60x60x97/1pcs	0.35	12/9	63/133
HA152-PS05-3.0	4000	60x60x97/1pcs	0.47	42/39	50/108
HA152-PS05-4.0	5000	60x60x97/1pcs	0.51	49/46	46/100
HA152-PS06-3.0	4000	60x60x97/1pcs	0.47	42/39	50/108
HA152-PS06-4.0	5000	60x60x97/1pcs	0.51	52/49	46/100
HA152-PS06-5.0	6000	60x60x97/1pcs	0.55	60/57	44/92
HA152-PS06-6.0	7000	60x60x97/1pcs	0.59	68/65	/88

